


INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.

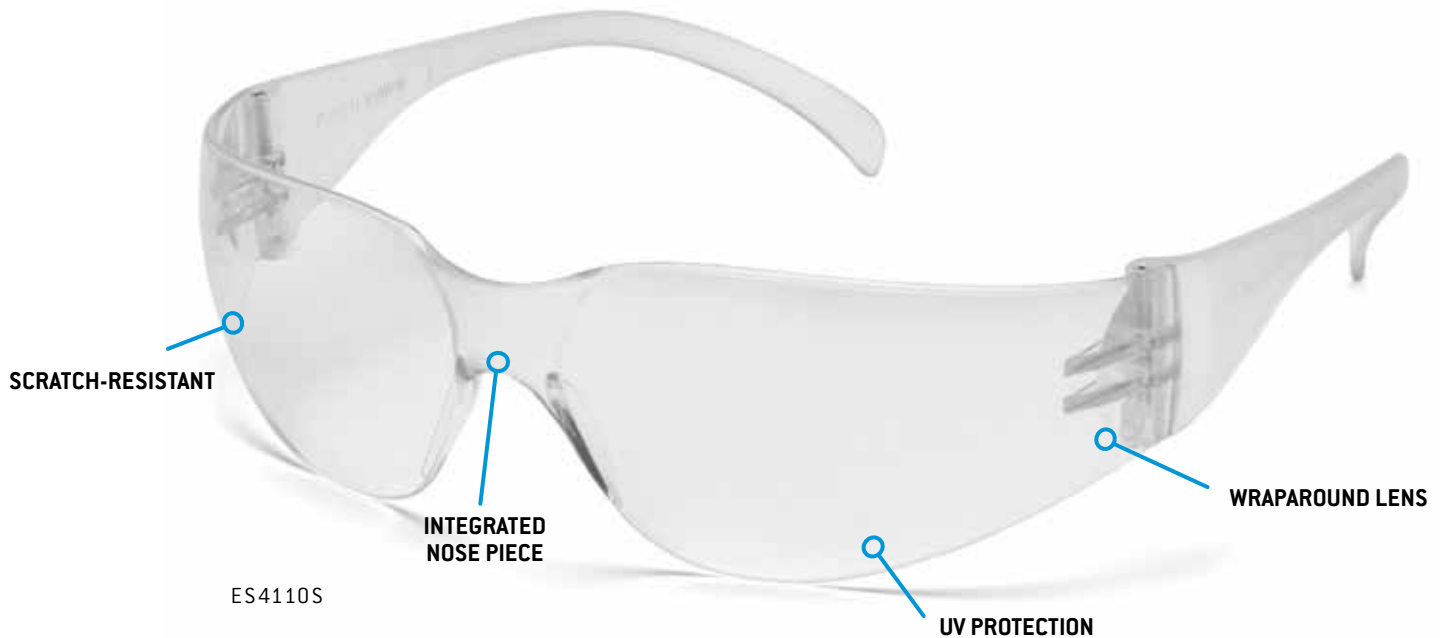

FEATURES

Unparalleled Comfort: Experience the ultimate in comfort with these frameless, lightweight safety glasses, ideal for long hours on the job

Enhanced Field of Vision: Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

Confident Fit: Integrated nose piece securely positions the glasses, ensuring they stay in place, providing reliable eye protection

Anti-Fog Clarity: (Select styles) Treated with anti-fog properties to guarantee fog-free clarity, even in extreme conditions

Built Tough: Meets EN166 standard for eye and face protection devices. CE & UKCA certified



ES4120S



ES4130S

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.



VARIATIONS



Lens and Temples

| | | | | | |
|------------|----------|------------|---------|-----------|-------|
| ● ES4110S | Clear | ● ES4120S | Gray | ● ES4130S | Amber |
| ● ES4110ST | Clear AF | ● ES4120ST | Gray AF | | |

MATERIALS

| Lens | Temples | Hinge | Screw |
|---------------|---------------|---------------|-----------------|
| Polycarbonate | Polycarbonate | Polycarbonate | Stainless Steel |

MARKINGS

| Part No. | Lens Marking | Frame Marking | Lens Marking Symbols | Temple Marking Symbols | Measurements |
|----------|----------------------|---------------|---|--|---|
| ES4110S | 2 C - 1.2 P 1 F CE | CE P EN166 F | Code - field of use | Symbols | Weight: 23.1 gm |
| ES4110ST | 2 C - 1.2 P 1 F N CE | CE P EN166 F | 2 or 3: UV filter | CE: Europe standard | PD: 64 mm |
| ES4120S | 5 -2.5 P 1 F CE | CE P EN166 F | 5 or 6: Solar filter | P: Manufacturer's mark | Bridge: 17.27 mm |
| ES4120ST | 5 -2.5 P 1 F N CE | CE P EN166 F | Color perception | EN166: CE specification for protective eyewear | Lens base: 10 curve |
| ES4130S | 2 - 1.2 P 1 F CE | CE P EN166 F | C: Unimpaired color perception | Mechanical Strength | Lens size diagonal: 77.08 mm |
| | | | Protection class | F: Low energy impact | Lens size vertical: 43.38 mm |
| | | | 1.2 - 6: Degree of visible light filtration | | Lens thickness: 2.5 mm |
| | | | Optical class | | Overall length (lens - tip): 156 mm |
| | | | 1: High optical quality - no optical distortion | | Overall width (hinge - hinge): 135.5 mm |
| | | | Mechanical Strength | | Closest point between lens: 16.67 mm |
| | | | F: Low energy impact, resists a 6 mm, .86 g at 45 m/s | | |
| | | | Symbols | | |
| | | | P: Manufacturer's mark | | |
| | | | N: Filter with anti-fog | | |
| | | | CE: Europe standard | | |

Product markings may vary // Updated as of 10.24