


556 Cushion-Ease Solid™ RS

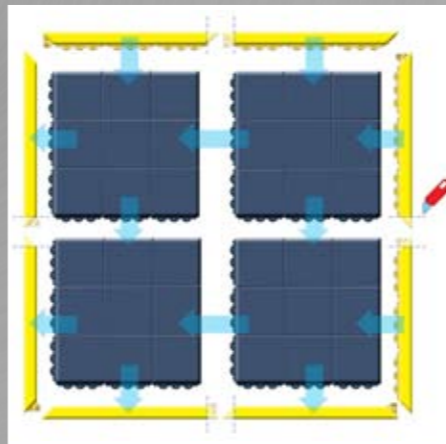

- 75% nitrile rubber compound, this mat is grease resistant.
- Closed anti-slip “pebble structure” surface.
- This interlocking mat allows on-site customization. Square snap together units of 91x91 cm that can be assembled effortlessly and laid out from wall to wall or as islands, in any direction or shape.
- Compatible with patented MD-Ramp System™ for smart safety bevelling solutions; allow out- and inside corners.
- Superb anti-fatigue properties due to its unique design underneath and high quality resilient rubber compounds.
- Designed to yield a long service life.
- Resistant to most chemicals and extreme temperatures.
- Free of silicone therefore safe for vehicle painting facilities.

556 Cushion Ease Solid™ RS

PRODUCT SPECIFICATIONS		
Designation	Industrial matting	
Type	Anti-fatigue	
Description	Modular system, with pebble anti-slip surface, grease resistant	
Material	75 % nitrile rubber compound	
Process	Compression moulding	
Category	Best	
Recommended use	Heavy duty - dry industrial environments	
Colours	Black	
Weight	15 kg/m ²	
Thickness	19 mm	
Standard sizes	91 cm x 91 cm	
Custom sizes	N/A	
Special remarks	Grease / chemical resistant. Accessories: MD Ramp System™ male and female attachable bevels 91 cm, black or yellow.	
PRODUCT TESTING		
Tests	Norms	Results
Compression deflection	U.S.	
	1.4 kg/cm ²	
	2.8 kg/cm ²	
Foam battery	ASTM D3574	
Abrasion resistance	ASTM D3884-01	
	500 Cycles	
	5000 Cycles	
Static coefficient of friction	ASTM C1028-96	
Elongation	ASTM D412	
Breaking load	ASTM D412	
Graves tear strength	ASTM D 1004	
Hardness	ASTM D2240-02	
Anti-slip	DIN 51130 and BG-RULE BGR181	R9
FIRE TESTING		
	Critical radiant flux	ASTM E-648
	Fire retardancy	DIN4102
		EN 13501-1
Flammability test	ASTM D2859	
ESD	ANSI ESD S7.1 50% Humidity	
Sustainability	<ul style="list-style-type: none"> • Recyclable material • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) 	